




Huawei P9 Battery Replacement

Use this guide to replace the battery in your Huawei P9 smartphone.

Written By: Tobias Isakeit

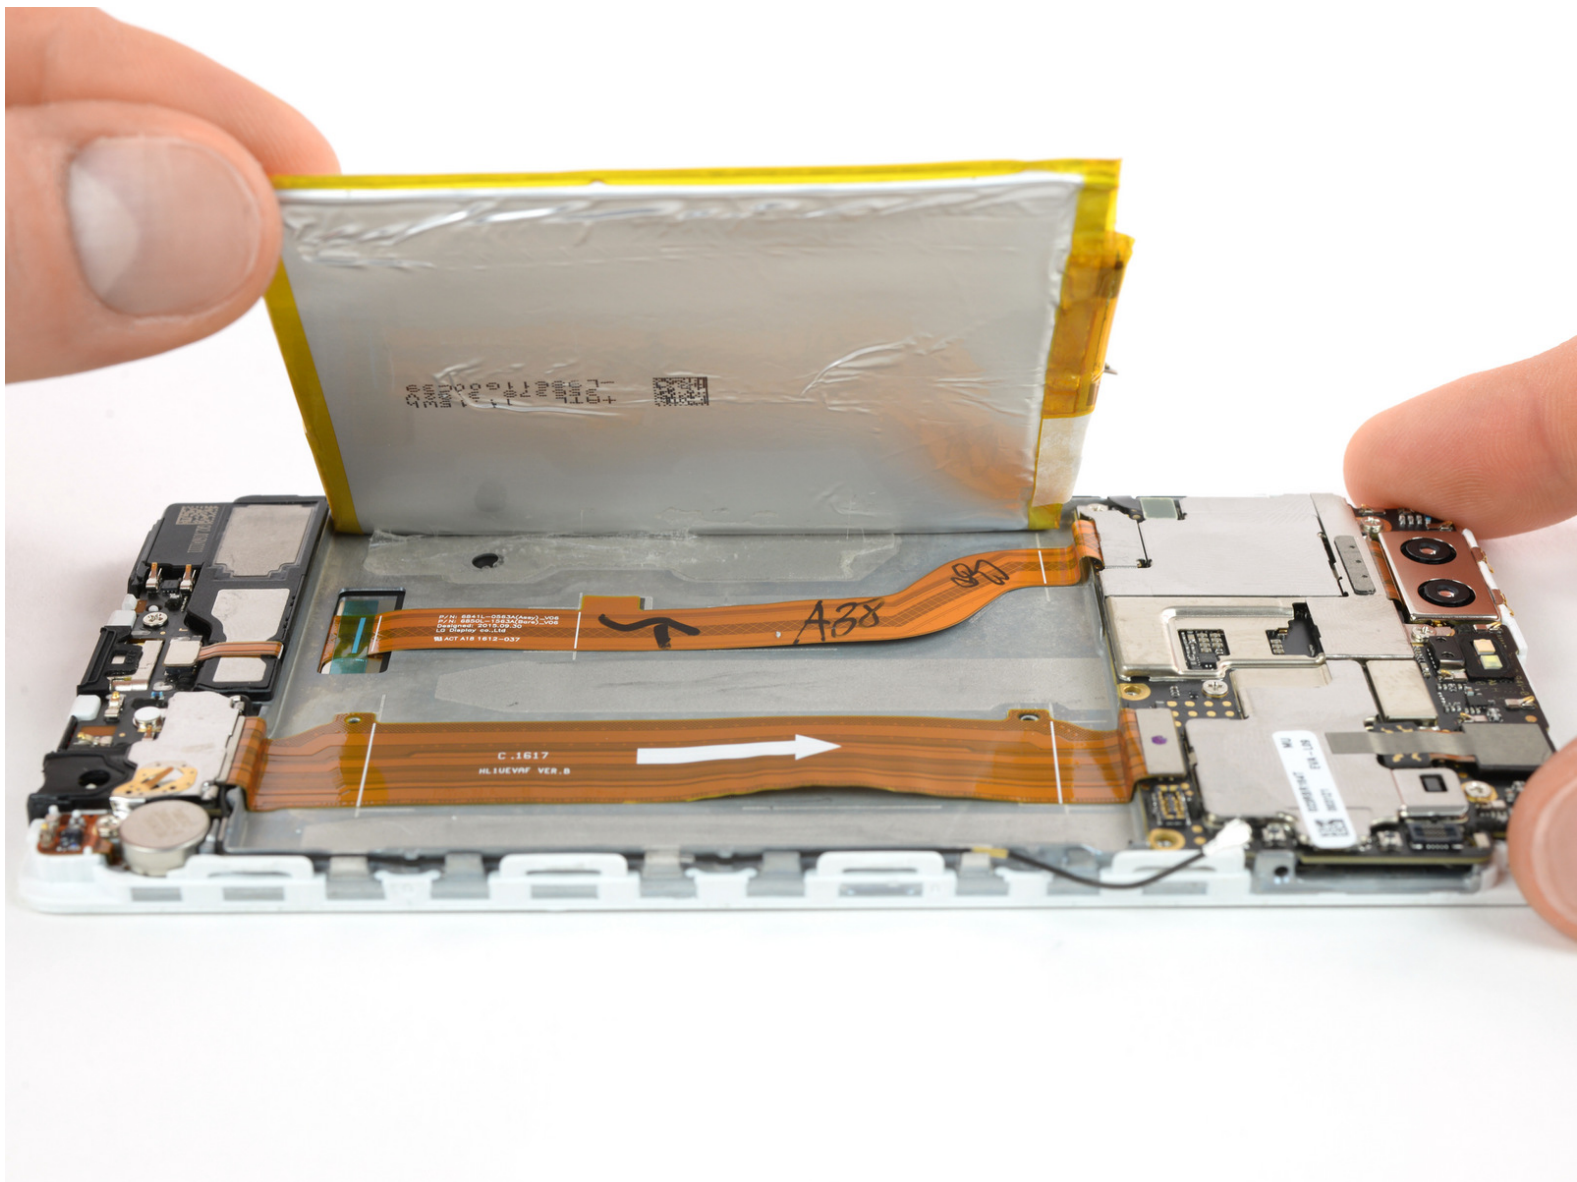

INTRODUCTION

Use this guide to replace the battery in your Huawei P9 smartphone.



TOOLS:

- [SIM Card Eject Tool](#) (1)
- [Spudger](#) (1)
- [Tweezers - Pro/ESD/Angled](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [iSclack](#) (1)
- [P2 Pentalobe Screwdriver iPhone](#) (1)



PARTS:

- [Huawei P9 P9 Lite Honor 8 Replacement Battery](#) (1)

Step 1 — Back Cover




- First switch off your phone and remove the SIM card tray.
- Unscrew the two Pentalobe P2 screws located at the bottom next to the device's USB C port.
- ⓘ If the screen is cracked you might want to use some tape to protect your eyes from glass shreds and get a better grip to open the phone.

Step 2




- Use an iSclack or a suction handle to separate the display unit from the rear panel.
- ⚠ Don't remove the rear panel completely yet. There is a cable connected to it! It is running from the finger print sensor to the display unit.

Step 3 — finger print sensor

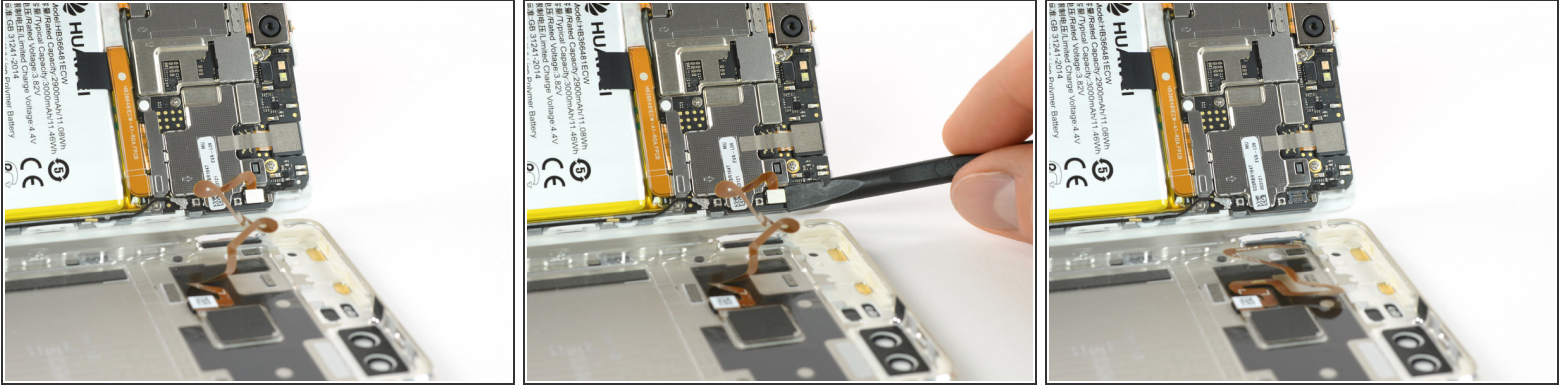

- Disconnect the finger print sensor using a spudger.

Step 4 — Battery

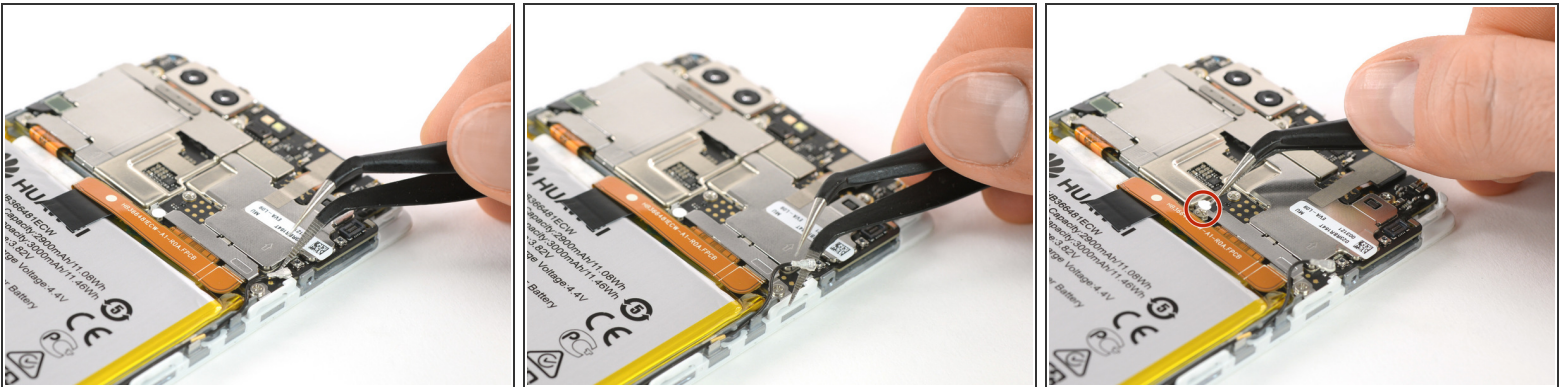


- Unplug the antenna cable.
- Remove the liquid contact indicator that sits on top of the screw.

Step 5



- Unscrew the two Phillips #000 screws that hold the metal plate in place.
- The plate, which is covering the battery connector, has two little hooks on each side. Use a tweezer to free them and unhinge the plate by carefully moving it upwards.

Step 6

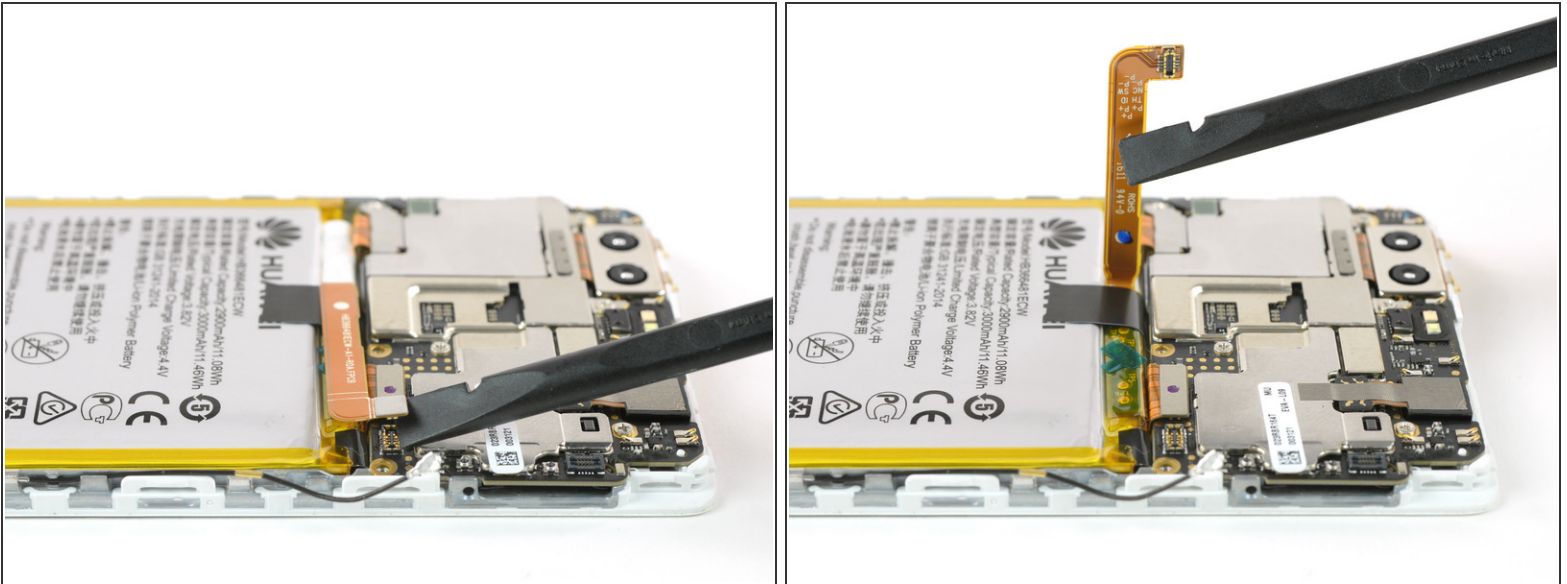


- Now you can unplug the battery connector and bend it aside.

Step 7



- Free the ends of the adhesive pull tabs to get a good grip on them.

Step 8

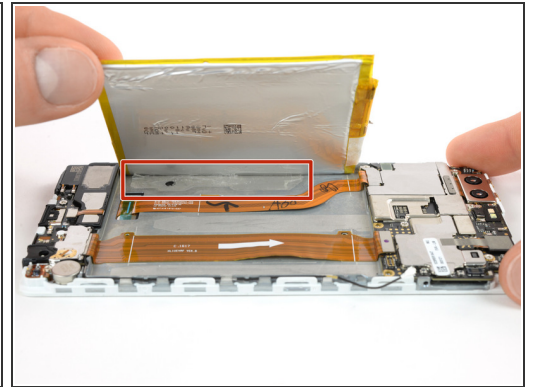

- Pull the adhesive tabs in a slow constant movement to free the battery.
- ⓘ Should those adhesive tabs snap, you might want to use an iOpener to heat and soften them a little bit so you can pry out the battery with a spudger.
- ⚠ There are two cables running directly underneath the battery. Take care not to damage them when prying with a spudger! You can see their position in the last picture.
- Slowly lift the battery and free it from the remaining hidden piece of adhesive. Done!

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-05 06:03:39 PM.